


Set up user PIN Numbers for First Output



Set up Delay Time for First Output



Set up user PIN Numbers for Second Output

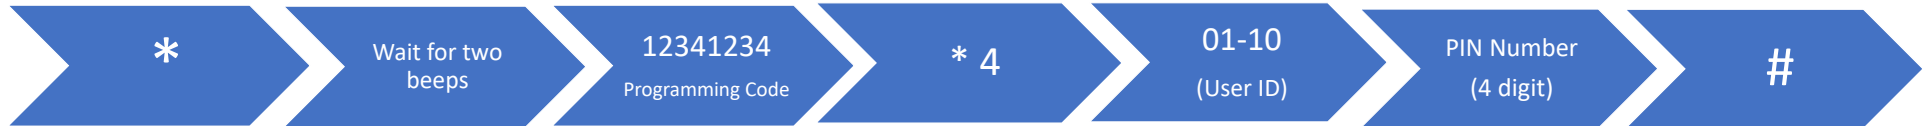

Set up Delay Time for Second Output




Set up New Programming Code




Delete One User



Delete All the Users

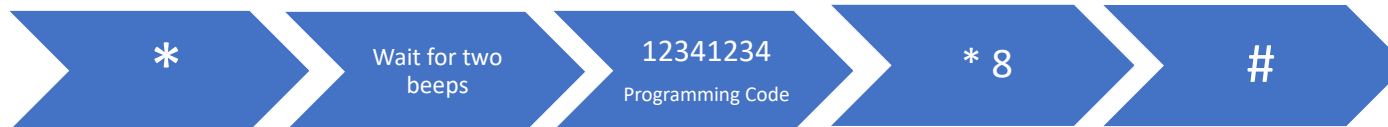

Set Programming Code to Factory Default

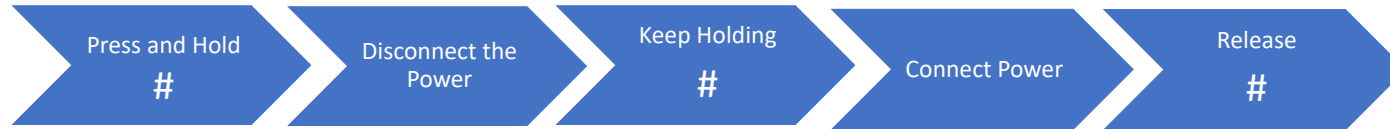

Factory Reset

